

(10)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 127 958 B1

(12)

EUROPEAN PATENT SPECIFICATION(43) Date of publication of patent specification: **11.03.92** (31) Int. Cl.⁵ **G01N 33/48**(21) Application number: **84303091.7**(22) Date of filing: **08.05.84**

Divisional application 89116797.5 filed on
08/05/84.

The file contains technical information submitted
after the application was filed and not included in
this specification

(24) **Sensor electrode systems.**

(30) Priority: 05.05.83 GB 8312262
05.05.83 GB 8312261
06.09.83 GB 8323799
16.12.83 GB 8333644
11.01.84 GB 8400650
29.02.84 GB 8405262
29.02.84 GB 8405263

(42) Date of publication of application:
12.12.84 Bulletin 84/50

(43) Publication of the grant of the patent:
11.03.92 Bulletin 92/11

(64) Designated Contracting States:
BE CH DE FR GB IT LI NL SE

(56) References cited:
EP-A- 0 078 590 DE-A- 2 127 142
DE-A- 3 038 883 US-A- 3 224 436
US-A- 3 458 421 US-A- 4 224 125

(73) Proprietor: MediSense, Inc.
128 Sidney Street
Cambridge Massachusetts 02139(US)

(72) Inventor: Higgins, Irving John
Cotswold-Graze Hill
Ravensden-Bedford MK44 2TF(GB)
Inventor: McCann, James Michael
33 Dewhurst Road West Kensington
London W14 0ES(GB)
Inventor: Davis, Graham
1504 Fox Run Drive
Plainsboro-NJ 08536(US)
Inventor: Hill, Hugh Allen Oliver
9 Clover Close
Oxford OX2 9JH(GB)
Inventor: Zwanziger, Ron
45 Longwood Av. No. 608
Brookline, MA 02146(US)
Inventor: Treidl, Bernhard Ludwig
Medfield Street
Boston Mass.(US)
Inventor: Blrket, Nigel Norman
2 Astley Close
Sutton Ely Cambridgeshire CB6 2PG(GB)

EP 0 127 958 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

EP 0 127 958 B1

**Inventor: Plotkin, Elliot Verne
14 George Street
Bedford, MK43 3G(GB)**

**Ⓢ Representative: Clifford, Frederick Alan et al
MARKS & CLERK 57/60 Lincoln's Inn Fields
London WC2A 3LS(GB)**

Description

THIS INVENTION relates to sensor electrode systems.

Sensor electrode systems are known, for example, from DE-2127142, EP 78590 and US 4224125. The present invention is concerned with sensor electrode systems of the kind generally known from US 4224125. Our European Patent Application 82305597 (EP-A 78636) describes the construction of sensors comprising a conductive electrode coated with a mixture, or layers, of a catalytically active enzyme and a mediator compound and usually further coated with a retaining permeable membrane. When such a coated electrode is contacted with a substrate containing a species for which the enzyme exerts a catalytic effect, the mediator compound transfers charge to the electrode and this can be used to give a readout signal, against a standard electrode, correlated with the concentration of the said species, even in the presence of other species since enzymes are typically highly selective in their catalytic action.

Enzymes which have been investigated and utilised in such systems are listed elsewhere in this specification

Thus, numerous types of enzyme-coated electrodes have been utilised each specific to the presence of a physiological or other substrate for which the particular enzyme acts as a catalyst and each therefore potentially capable of acting to detect, measure or monitor the level of the substrate *in vivo* or *in vitro* and give a readout correlated for instance with an underlying physiological condition controlling or affecting the substrate level. In particular, use of glucose oxidase or bacterial glucose dehydrogenase as the enzyme, associated with suitable electron-transferring mediator compounds, has been shown to give readout signals correlating linearly with *in vitro* blood glucose levels over a wide range thus giving a diagnostic or measuring tool for diabetic conditions. Also, such electrodes can measure glucose levels in plasma, serum, interstitial fluid, saliva or urine.

The mediator compounds described in EP-A 78636 include polyviologens, fluoranil and chloranil. However, the preferred mediator compounds are metallocene compounds, and in particular the ferrocenes (biscyclopentadienyl iron and its derivatives).

The particular advantages of ferrocenes are as follows:-(a) a wide range of redox potentials accessible through substitution of the cyclopentadienyl rings (b) functionalisation of the rings, e.g. to confer solubility or chemical linkability to other such rings or other system components (c) electrochemically reversible one-electron redox properties (d) pH-independent redox potential and (e) slow autooxidation of the reduced form.

The ferrocene structure may be modified by substitution on the rings, and/or by association or polymerisation, which modifications affect the physical, chemical and electrical behaviour so that optimisation of a particular sensor electrode material is possible. In general use, the compound 1,1'-dimethylferrocene is a valuable mediator.

Compending Application EP 84303090.9 of even date herewith entitled "Assay techniques utilising specific binding agents" is concerned with the effect on the enzyme and/or mediator electro chemical availability of specific binding agents e.g. antigens/antibodies and others. It can be embodied by specialised electrodes. Such electrodes fall within the scope of the present invention and are discussed below. The interested reader is referred to the published specification, EP-A 125139.

The prior art Application EP-A 78636 referred to above discloses equipment utilising such sensor electrodes. In general it is suitable for research or institutional (e.g. hospital) use. The present invention is concerned with providing sensor electrodes and equipment for use by lab persons or without extensive technical back-up services.

Use may be made of such electrodes in chemical industry especially where complex mixtures are encountered, e.g. in food chemistry or biochemical engineering. They are however of particular value in biological investigation or control techniques, in human or animal medicine.

We have now established certain design criteria in the production of such electrodes for lay, or clinic, use.

The electrodes can be used in an invasive probe (i.e. one which enters body tissue to contact a body fluid such as whole blood or subcutaneous tissue fluid) or as part of an external test upon a withdrawn sample (using a syringe) or upon an expressed sample (e.g. using a needle-prick device). In each instance the electrode must be as small as practical to avoid trauma either on invasion of the tissue or withdrawing of the sample.

It must be elongate, either to fit within a pointed needle, or for ready handling as an electrode for ready assembly to equipment on the one hand and contact with the sample on the other. It must be sensitively manipulable. It must carry, prior to assembly or in the assembly structure, the reference electrode as well as the 'sensitive' electrode, in spaced non-contiguous relationship.

The present invention provides a sensor electrode system of the kind for use in detecting, measuring or monitoring a component in a liquid mixture, by monitoring the flow of current when an oxidoreductase enzyme catalyses a redox reaction of a substrate, and a mediator compound transfers electrons between an electrode and the catalytically active oxidoreductase enzyme; characterised in that the sensor electrode system comprises a throw away strip test electrode carrier carrying an area of working electrode material comprising the enzyme and the mediator compound, the area being adjacent to but non-contiguous with an area of reference electrode material, both electrode areas being of small dimension, and extending as or supported on the electrode carrier formed as an elongate member to facilitate manipulation before or during contact with live tissue or with a small withdrawn sample or body fluid.

Sensor electrode systems of this invention can be dipped into or similarly contacted with a liquid substrate e.g. a glucose-containing small blood sample or drop of blood.

In one aspect the invention provides a sensor electrode system for contact with a liquid mixture of components for detecting the presence of, measuring the amount of and/or monitoring the level of one or more selected components capable of undergoing an enzyme catalysed reaction, the sensor electrode system comprising:-

the elongate support member; on a surface thereof the area of the working electrode material being of electrically conductive material comprising at least at an outer surface thereof the combination of the enzyme and the mediator compound; on the surface of the elongate member, the area of the reference electrode; and separate electrical connection to each electrode for attachment to a read-out means denoting presence, amount, or monitored level of the said one or more selected components in a liquid medium with which the support member is contacted to contact both electrodes.

The elongate carrier conveniently comprises a flat strip.

The first electrode is preferably formed of carbon e.g. a filter paper containing carbon. We have also found that carbon foil e.g. as available under the Trade Marks "GRAPHOL" or "PAPYEX" is a valuable electrode material. The enzyme thereon can in theory be any enzyme, e.g. those listed in our European Application 84303090.9, but the use of glucose oxidase or dehydrogenase, e.g. the bacterial glucose dehydrogenase from *Acinetobacter calcoaceticus* is particularly valuable. Any suitable mediator compound can be used, but ferrocene or ferrocene derivatives (especially 1,1'-dimethylferrocene) are greatly to be preferred.

By way of example only, carbon foil can be glued to the strip; 1,1'-dimethylferrocene mediator can be deposited on the surface of the foil by evaporation of a toluene solution; and enzyme can be bonded to the surface by the use of 1-cyclohexyl-3-(2-morpholinoethyl) carbodiimide metho-p-toluene sulphonate (referred to below as "carbodiimide").

The second electrode can be any convenient reference electrode. We have found it useful to provide adjacent but not contiguous to the first electrode, a flat layer of silver and to convert the surface thereof to silver chloride so as to give an Ag/AgCl reference electrode.

Typically, the electrical connections can be wires which extend down, and are preferably adhered to, the strip, and make electrical contact each with its respective electrode.

The readout means is preferably a digital indicator suitably connected to a dedicated potentiostat which poises the carbon electrode potential at e.g. +150mV Ag/AgCl for a glucose system. The current flowing is then proportional to glucose concentration.

In a particularly valuable version of this type of sensor, it comprises (a) a flat first electrode area of known area small enough to be completely coverable by the smear of blood produced from a non-expressed drop of blood generated from a needle-prick at a bodily extremity, (b) a reference electrode area on the same surface separate from but sufficiently close to the sensitive electrode area that the said blood smear also reaches the reference electrode to establish electrical communication and (c) conductive elements extending separately along the same surface of, and thus insulated from the elongate support member, communicating one with each electrode for connection to signal read-out means attachable to one end of the member.

The area of the first (i.e. sensitive) electrode is generally substantially square; it may be rectangular or otherwise shaped, but in any case usually will correspond in area to a square of 5 mm edge length, or below e.g. from 2 to 4 mm. Equipment utilising the sensors of this invention can be portable or "desktop".

In one form, equipment utilises such electrodes to give visible readout correlated with a selected physiological parameter thus being capable of use in human or veterinary medicine by medical or nursing personnel, or by experienced lay subjects on a self-measurement basis.

For convenience, this document will refer hereinafter to blood-glucose-measuring equipment as being typical but not limitative of equipment with which the sensor electrode systems of the present invention can be used.

Diabetic subjects need to measure their glucose levels frequently. Hitherto, a common method carried out by the subject personally is a colorimetric test using a blood or urine sample which is applied over a surface area containing a colour-reactive detector chemical, adjacent to a comparison area, to give a colour change which is compared with a chart of colour values as an approximate measure of glucose level.

There are however defects in this method. Firstly, colorimetric changes are quantitatively difficult to assess, especially if the patient has impaired vision as a result of the diabetic condition. Indeed, because of this problem expensive automatic colour comparison equipment may need to be purchased by some subjects for interpreting the test results. Secondly, the blood test, while inherently more accurate than a urine test, needs a large enough sample to cover the test surface. Thirdly, it requires the patient to time the colour development accurately. Since blood samples, on a self-treatment basis are taken from body extremities (fingers, toes, earlobes) they are normally not large enough when obtained by a simple needle-prick, and must in fact be expressed i.e. squeezed or massaged out to form a larger drop. Progressively, the tissue of the extremities becomes scarred and coarsened by such treatment to an extent whereby finding fresh testing sites presents a problem.

In order to embody the invention on a home-diagnostic basis a main object of the present invention in one aspect is as described above the provision of small scale non-traumatic test pieces, as an external test electrode strip capable of using the naturally-arising small blood droplet from a needle-prick tester, without tissue massage. Examples are described in more detail below.

These small-scale electrodes are intended as single-use throwaway articles and are utilised in conjunction with electrical circuitry and a readout means, to which they must be easily attachable and detachable. Such circuitry and readout means is itself preferably embodied on a very small scale.

We have accordingly found that the totality of the equipment is subject to certain design constraints. Thus it is a further object of the invention in this form that the device should be non-traumatic to the user either physically e.g. if used with its own invasive probe or psychologically by virtue of its appearance.

It is a further object of the invention in this form that the device should be capable, despite the small size of the throwaway electrode and of the permanent circuitry/readout components, of easy assembly and disassembly even by juvenile or elderly lay users.

It is still a further object of the invention in this form to ensure that the relatively expensive permanent circuitry/readout components should, despite their small size, be of a form which minimizes loss or damage.

It is still a further object of the invention in this form to provide a device the display readings of which are visible and understandable to a non-expert user.

We have now found that these and other objects of the invention can be met by assembly of the circuitry/readout components into a housing resembling a pen or digital-watch.

Thus, for use with sensor electrode systems of the present invention, there is provided an assembly of circuitry and display means for use in producing a readout value as a diagnostic aid in human or veterinary medicine, housed in a pen-like hollow elongate housing having (a) at one end an electrically conductive socket suitable to receive the outer end of the sensor electrode system capable of producing an electrical signal correlating with a physiological parameter to which the sensor electrode system is selectively sensitive and (b) towards the other end a digital read-out window for exhibiting a numerical value corresponding to the parameter. A thermistor may also be used for temperature compensation.

The person skilled in the art of designing medical equipment will appreciate that use of the invention extends to the pen-like assembly in combination with an attached sensor electrode system as test member, and to the combination as a kit of interrelated parts of such an assembly with a plurality of test members suitable for one-off use.

The term "pen-like" is a general limitation on size and shape. In functional terms, its characteristics are such that it can be held near the socket between the thumb and the nearer one or two opposed fingers, with the elongate body resting on and extending beyond the forefinger, but not to an extent that prejudices fine control of the socket end by the thumb and fingers. In numerical terms it can be from 10 to 30 cm. long and from 0.5 to 3 cms across its maximum transverse dimension; more usually it will be from 12 to 20 cms. long and from 0.8 to 1.5 cms. across. It can be generally circular, or polygonal, in cross-section. Each detachable test member is usually a small-scale enzyme-coated sensor electrode, of the type discussed in the earlier Patent Applications listed above, and especially such an electrode where the enzyme is specifically glucose-catalyzing whereby diabetic conditions can be measured. It may be a flat external strip electrode dimensioned to operate on a small, non-expressed, blood droplet. The socket arrangement will vary accordingly.

In one embodiment of the present invention, two or more sensor electrodes may be incorporated into a single test member. Again, the socket arrangement will vary accordingly.

The readout means will typically be a conventional seven-segment display window towards the rearward

end of the "pen" as in conventional pen/watches. In the case of the multiple sensor embodiment described in the preceding paragraph the display may be switchable between each sensor's discrete monitoring circuit, both the display and a single monitoring circuit may be switchable between sensors, or, a specific display may be provided for each of the sensors present.

Such equipment is of course particularly adapted for use with the non-invasive strip sensor defined above.

Another form of equipment for use with the sensor electrode systems of the present invention is so-called "desk-top" equipment, i.e. for general but skilled use in a general clinic.

In this aspect, the aim is to provide suitable equipment for a practitioner of "desk-top" scale and complexity and while use of such equipment may, according to the invention, be envisaged for any enzyme-catalysable component (with suitable electrode systems) for convenience this specification will refer to glucose determination as typical.

In the operation of a glucose sensor a number of relevant technical points and advantages should be considered. It will be appreciated that these points are of general relevance and should by no means be restricted in this application to the particular design features of the present application: in other words, they apply generally to the embodiments listed above, and especially to those embodiments insofar as they deal with equipment and methods for glucose sensing. These features are:-

I Constructional Features

(a) Membrane cover for electrode

Although the enzyme electrode should be in electrical contact with the liquid, it may be found valuable to exclude the sensor from interfering contact with larger molecules or tissue fluid components. This can be done by a covering or surrounding membrane, depending on electrode geometry. Heat-shrinkable thin polymer tubing can be used as, or in connection with, such membranes.

The membranes can be polymerised in situ (e.g. cellulose acetate). A particular valuable membrane is formed by polycarbonate, especially those polycarbonates sold under the Trade Marks "NUCLEOPORE" or "STERILIN". When tissue fluids are examined they may contain ascorbate; polycarbonate membranes do not permit the passage of ascorbate and thus virtually eliminate interference from that substance. Alternatively a polyurethane membrane may be employed.

(b) Type of carbon

Carbon foil, as strips, or carbon attached to metal meshes, of pyrolytic grade and known by the Trade Marks "GRAPHOL" and "PAPYEX" are much preferred for carbon-ferrocene electrodes for use with glucose oxidase. Oxygen interference is minimal, there being less than 4% change in signal between anaerobic and fully aerobic samples. Their physical nature is also very convenient for fabrication, especially of small-scale devices.

II Operational features

(a) Operational potential

Preferably operation should take place at a potential equivalent to +50 to +200 mV vs. SCE since interference caused by oxidation of other chemical species present is thereby reduced.

(b) Concentration range

Glucose oxidase can be used to monitor glucose concentrations of 0 to 40 mM, and glucose dehydrogenase at 0 to 20 mM when immobilised on a carbon-ferrocene electrode. The sensor response is linear up to about 40 mM.

(c) Response times

The glucose oxidase sensor without membrane is kinetically limited giving rapid response times i.e. about 20 seconds to 95% of the steady-state current response.

(d) Oxygen-sensitivity

Glucose dehydrogenase/ferrocene electrodes are totally oxygen-insensitive.

5 (e) Use of third electrode

In practice, a realistic device can achieve good performance without a third electrode, using Ag/AgCl as a reference counter-electrode, as described more fully below.

10 (f) pH and temperature

Glucose oxidase electrodes show no change in current output between pH6 and pH9, and are thus relatively pH-insensitive. They are temperature-stable up to 40°C. If necessary temperature compensation can be effected using a thermistor, or a constant temperature jacket may be used. Also, operating with the
15 electrodes diffusion-limited minimises temperature effects.

(g) Storage of Electrodes

Electrodes may be stored moist. Extended storage, over months or years, may be achieved by freeze-
20 drying or air-drying.

Finally, some aspects can be considered of the electrical circuitry for operating the equipment as described.

The sensor electrode systems of this invention can be employed with a measuring device comprising means for comparing an electrical output of the electrode system with an electronic reference and means
25 for providing a signal related to the electrical output of the electrode.

By employing an electronic reference rather than a cell or reference electrode a measurement using a sensor including an electron-transfer electrode may be made without the use of a separate electrode as a reference.

In a preferred embodiment of the invention, the electron-transfer electrode is poised at a fixed potential
30 against a reference electrode, and the current flowing in the electron-transfer electrode is measured.

The particular electron transfer electrode may be selected from a range of electrodes including those employing the following enzymes

35

40

45

50

55

| <u>Enzyme</u> | <u>Substrate</u> |
|----------------------------------|--------------------------------|
| <u>Flavo-proteins</u> | |
| 5 Pyruvate Oxidase | Pyruvate |
| L-Amino Acid Oxidase | L-Amino Acids |
| 10 Aldehyde Oxidase | Aldehydes |
| Xanthine Oxidase | Xanthines |
| Glucose Oxidase | Glucose |
| 15 Glycollate Oxidase | Glycollate |
| Sarcosine Oxidase | Sarcosine |
| 20 Lactate Oxidase | Lactate |
| Glutathione Reductase | NAD(P)H |
| Lipoamide Dehydrogenase | NADH |
| 25 | |
| <u>PQQ Enzymes</u> | |
| 30 Glucose Dehydrogenase | Glucose |
| Methanol Dehydrogenase | Methanol and other Alkanols |
| 35 Methylamine Dehydrogenase | Methylamine |
| 40 | |
| 45 | |
| 50 | |
| 55 | |

Haem-Containing Enzymes

- 5 Lactate Dehydrogenase
(Yeast Cytochrome b_2)
Horse-radish-Peroxidase
10 Yeast Cytochrome c Peroxidase

Lactate

Hydrogen Peroxide

Hydrogen Peroxide

Metalloflavoproteins

- 15 Carbonmonoxide Oxidoreductase

Carbon Monoxide

Cuproproteins

- 20 Galactose Oxidase

Galactose

The invention will be further described with reference to the accompanying drawings, in which:-

Figure 1 is a front view of a strip-supported electrode configuration;

Figure 2 is a back view of the combination shown in Figure 1;

Figure 3 shows an alternative strip-supported electrode;

Figure 4 shows a strip-supported electrode which is a variant of Figure 3;

Figure 5 shows a modified connection of the strip electrode of Figures 3 and 4;

Figure 6 shows a further alternative supported electrode;

Figure 7 shows a combination of two electrode supports;

Figures 8a and 8b are general diagrammatic side views of a pen-like portable holder, of particular utility for the electrodes shown in Figures 3, 4 and 5, having an assembly of circuitry and having a read-out window;

Figure 9 shows a schematic diagram of one form of electrical circuitry for use with the electrodes and equipment of the present invention;

Figure 10 shows a more elaborated circuit diagram for use in the embodiment of Figure 9;

Figure 11 shows a schematic diagram of an alternative embodiment of electrical circuitry; and

Figure 12 shows the more elaborated circuit diagram of a yet further embodiment of circuitry.

In the following description of Figures 1 and 2 dimensions, materials amount and proportions are given by way of example only.

A strip of epoxy glass 1, $9.5 \times 40 \times 1.6$ mm, has two 1 mm diameter holes 2 and 3 therein. A 9×9 mm piece of graphite tape or foil 4 is glued on one face, near the end to cover hole 2 and a 4×9 mm strip of silver foil 5 is glued adjacent thereto over hole 3. Wires 6 and 7 (Fig. 2) on the back enter holes 2 and 3 respectively for electrical connection with the respective electrode material 4 and 5, being glued in the holes by conductive epoxy resin 8. A stabilising layer of epoxy resin is present over at least part of the back e.g. at 9 to keep the wires in place. Carbon electrode 4 is covered with 1,1'-dimethylferrocene and glucose oxidase. Silver electrode 5 is covered with silver chloride.

The strip is made up in the following sequence:-

- (a) drill holes 2 and 3,
 (b) glue on electrodes 4 and 5; "ARALDITE" epoxy resin is suitable but should not enter holes 2 and 3,
 (c) attached wires 6 and 7, using conductive epoxy 8, and apply "ARALDITE" resin at 9 the fix the wires in place,
 (d) hold the silver electrode at +400 mV vs. SCE in 5M chloride for 10-15 seconds to deposit a thin AgCl layer,
 (e) apply a solution of 1,1'-dimethylferrocene (4 μ l) in toluene (20 mg/ml) to the graphite tape 4 and allow to evaporate,
 (f) cover the ferrocene-coated tape with 50 μ l of carbodiimide (25 mg/ml) in pH 4.5 acetate buffer for 1 1/2 hours and

(g) rinse and cover with glucose oxidase (12.5 mg/ml) in pH 5.5 acetate buffer for 2 hours.

(g) rinse and cover with glucose oxidase (12.5 mg/ml) in pH 5.5 acetate buffer for 2 hours.

The strip can be used by attaching wires 6 and 7 to a potentiostat posing the potential at electrode 4 at +150 mV. vs. Ag/AgCl, and dipping the strip into a glucose-containing solution so that both electrodes 4 and 5 are covered. The shape of the strip facilitates such handling. The current flowing is proportional to glucose concentration.

Figure 3 shows a strip electrode 17 made of, for example, a ceramic material or printed-circuit-board laminate. It includes a square area 18 with connector lead 19, the square being covered with the enzyme-containing layers as described above. It further includes a small reference electrode area 20 and separate connector lead 21. The rearward end 22 of the electrode 17 fits into a socket as shown in Figures 8a and 8b and described below. It is to be noted that, as with the needle 10, the electrode strip 17 is a small-scale device. Thus square area 18 is of a side length only about half that of each of two square colorimetric test areas of conventional diagnostic tests and can be used with the original non-expressed bead of blood from a needle-prick device, which is adequate to cover the whole of the square area and communicates electrically with reference electrode area 20. For example the strip electrode as shown in Figure 3 needs to be embedded into the skin only along the strip, and only a narrow pathway along the strip.

Modifications may be made to the embodiments shown in Figure 3. For example the strip electrode as shown in Figure 3 can be longer, whereby electrodes 18 and 20 are located only partly along the strip, leaving a free end 22a to facilitate ease of handling by the patient without damaging or touching the electrodes. Also, the electrode strip can clip within two opposed contacts or resilient mounting 31, the routing of one or other of conductive lines 19 and 21 being modified accordingly.

Figure 4 shows a longer strip, and Figure 5 shows the inner end of a strip held between two resilient metal contact strips.

In Figure 6 a 2 cm length of electrically insulating polymer for example MYLAR or TEFLON (a polyfluorocarbon) 0.3 mm square in transverse cross-section is provided with a palladium-silver conductive electrode 31, on the front surface as shown, and a second, smaller electrode 32, on the back as shown in dotted lines. In each case conductive lines 33 and 34 respectively, were formed simultaneously with the electrodes.

The substrate is painted a mixture of toluene, 1,1'-dimethyl ferrocene and graphite, formed by dispersing the ferrocene and graphite, in toluene and carbon tetrachloride.

on the front electrode 31 is painted a mixture of toluene, 1,1'-dimethyl ferrocene and graphite, formed by mixing a solution of the toluene and 1,1'-dimethylferrocene and a slurry of toluene and graphite. It is believed that the ferrocene is adsorbed on to graphite particles. After drying the mixture forms a layer 35. A layer 36 of glucose oxidase is then immobilised on the graphite surface by carbodiimide immobilisation, known per se (enzyme adsorption can also be used). The electrode may then be covered, on both sides, with a semipermeable membrane of cellulose acetate (or polyurethane), not shown, to block large interfering species from contact with the electrode.

The square section of the support helps in the painting of slurry, or the enzyme-attachment stages, in keeping the electrodes 31 and 32 distinct.

35 The square section of the support helps in keeping the electrodes 31 and 32 distinct. The small scale electrode so produced could be used per se but is especially valuable for incorporation into a standard gauge needle, giving a blood-glucose reading using the same invasive member as the eventual injection.

When producing such small scale needles, the exact sequence of steps can vary. For example, graphite could first be painted on, and a solution of the mediator (ferrocene, etc) in toluene then be applied by dipping into the graphite. Likewise, the enzyme can be applied in solution for adsorption. There is therefore a danger that the reference electrode e.g. silver/palladium could be adversely affected by the solvents or solutes used.

Figure 7 shows the key steps of a procedure which can be used to advantage in the fabrication of these microelectrodes.

Figure 7 shows the key steps of a process for forming the electrode assembly 30. The reference electrode 37 and its conductive lead-out strips 38 are formed in silver/palladium on microelectrodes. The reference electrode 37 and its conductive lead-out strips 38 are formed in silver/palladium on TEFLON base 39. Similarly, an electrode support 40 and lead-out strip 41 are formed in silver/palladium on a TEFLON base 42. Only this base 42 and its electrode support are then subjected to (a) painting on a graphite slurry in toluene (b) dipping in 1,1'-dimethylferrocene solution in toluene and (c) contacting with the enzyme to absorb e.g. glucose oxidase into the active layer 43. Thereafter the bases 39 and 42 are glued or held, side-by-side, their general rectangular cross-section facilitating such positive location. Back-to-back location is also possible. This may be located inside a needle bore, e.g. with extra access portions

As before, the finished assembly may be located inside a needle bore, e.g. with extra access portions near the electrode surfaces.

55 Incorporation of 1',1'-dimethylferrocene into the electrode

A solution of 1',1'-dimethylferrocene in toluene was mixed into a toluene-based slurry of the graphite

powder. The mixture was then painted on to the base conductor 41 and allowed to dry at 43. This provided an electrode surface that was electroactive towards glucose oxidase.

These experiments showed that "thick layer" or screen-printing technology could provide a usable base strip which could easily be coated with a stable graphite surface and that moreover the electrode surface could be made electroactive towards glucose by adsorption of a ferrocene directly into the coating mixture. In addition, the reference electrode operated satisfactorily in buffered solutions.

Figures 8a and 8b show a holder which is particularly adapted to utilise electrodes as shown in Figures 3, 4, 5 but which could if necessary utilise electrodes as shown in Figures 1 and 2, and 6 and 7 at least of the various embodiments shown.

From above the holder 81 intentionally resembles a conventional pen/watch as much as possible. It has a forward end 82, possibly rotary to tighten the walls of a flattened socket cavity 83 formed within it. A central join, a clip 84 and a press-button 85 all resemble those of a conventional pen, and digital readout-window 86 is also of a type known in pen/watches.

Inside the holder as shown by dotted lines is connection circuitry 87, possibly printed in situ, battery 88 and operating circuitry 89 behind and manufactured as a unit with the display window 86. The display can be capable of operation only when button 85 is pressed so that extra illumination can be provided if necessary.

The embodiments shown in Figures 8a and 8b especially when used in conjunction with the electrodes of Figures 3 - 5 fulfil the design criteria discussed above for such portable equipment.

The delicate manipulation facilitated by the pengrip (e.g. by thumb and finger) means that the small electrodes e.g. of Figures 3, 4 or 5 can be easily assembled into, or detached from, the socket. A user will always orient the holder with the window 86 visible thus always giving a uniform relative orientation to the socket 83 whereby the rearward ends of the fragile electrodes can be fitted without experiment and damage.

The "pen" format is instinctively picked up after use and safely carried in a pocket, more so than for any other small device. Thus the expensive part of the equipment is safeguarded. Furthermore, it is possible to incorporate a conventional timer circuit into the device thereby fulfilling the actual function of a pen-type watch and providing an audible or visible signal which marks the point in time at which a reading should be taken.

Finally, the display is numerical, clearly visible and if necessary can be supplemented by an illuminating light source.

In Figure 9, a sensor 101 is connected between a voltage buffer 102, and the inverting input 103 of the operational amplifier 104 which is configured as a current amplifier. An electronic reference 105 connected to the non-inverting input 106 of the operational amplifier is fed into a low-pass filter 107 which removes rapid signal fluctuations (which may be due to noise, earth hum or other sources of interference) while allowing the filtered output of the operational amplifier 104 to be fed into the digital volt meter (D.V.M.) 108.

The digital volt meter is supplied with clock pulses via the divider 109, from the timer 111. The D.V.M. drives a liquid crystal display 112. The electronic reference 105, is either of a pre-selected value or capable of being selected for a particular electron transfer electrode.

In each of the embodiments of electrode discussed above the sensor comprises a mediator-carrying surface which has one or more enzymes immobilized thereupon. The sensor further includes a silver/silver chloride (Ag/AgCl) internal reference electrode. If, for example, a voltage of +200 mV volts is preferentially dropped across the electrode as is the case with a glucose-oxidase-containing electrode, then the reference voltage 105 is selected accordingly.

In Figure 10, the electronic reference comprises resistors 152, 153 and 154 together with diodes 151. A voltage is selected at 0.3V by a suitable choice of resistor values at 152, 153 and 154. The voltage across the resistor 153 is 1V, which ensures that 100 μ A of electrode current will give a full scale reading of 999 on the liquid crystal display 109.

Non-inverting buffer 102 ensures that the voltage on the terminal 101A remains substantially constant. The sensor 1 (Figure 1) is connected across terminals 101A and 101B.

The operational amplifier 104 is connected via its inverting input 103 to the terminal 101B and the feedback resistor 141. The non-inverting input 106 is connected to the electronic reference.

A first-order low-pass filter 171, 172 is connected across the feed-back resistor 141, and supplies an analog signal to the D.V.M. 8. Pin values are given for a 7116CPL chip (manufactured by Motorola). The D.V.M. drives a liquid crystal display 112.

Clock pulses for the D.V.M. are supplied from the timer 111, (pin values are given for a 555 chip) via the dividers 191 (pin values for an MC 14020B) and 192 (pin values for an MC14016B chip). The connection 193 to pin 11 of the divider 191 enables a power-up reset.

In Figure 11 an alternative circuit is shown which does not make use of the non-inverting voltage buffer 102, but has the sensor 101 connected between the operational amplifier 104, and ground. The embodiment shown in Figure 11 employs a fixed reference voltage which is provided by a circuit differing from that of Figure 10.

5 In this embodiment, the diode 155 functions as a voltage-reference diode and provides a reference voltage drop across its ends equal to the diode forward voltage.

By a suitable choice of the values of the resistors 156, 157 and 158 the correct voltage may be applied across the electrode. In this embodiment the sensor again employs as the reference an Ag/AgCl couple and across the electrode. In this embodiment the sensor again employs as the electron-transfer electrode.

10 Figure 12 shows a third embodiment of the present invention, which provides a continuously variable immobilized glucose oxidase in the presence of a mediator compound as the electron-transfer electrode, that is, reference voltage which may be selected to accommodate any type of electron-transfer electrode, that is, one, which for example, employs any of the enzymes listed herein or any combination of these enzymes. The LED display is not shown.

In Figure 12 the feedback resistor 141 in circuit at any given time may be selected from resistors 141a, 141b, and 141c by means of switch SW2a which is ganged with switch SW2b. This allows the current output of the sensor 101 to be displayed in three ranges, for example, 1 μ A 10 μ A or 100 μ A full scale. Furthermore, the range may be trimmed by using the variable resistors 142a and 142b.

The embodiment shown in Figure 12 has the non-inverting voltage buffer 102 of the embodiment shown in Figure 10.

20 The reference voltage for the embodiment shown in Figure 12, is derived from the circuit elements 501-505 which include the potentiometers 503 and 502 providing a variable voltage across the sensor 101, thereby accommodating any type of electron-transfer electrode. It is envisaged that the continuously variable resistors 142a and 142b could be replaced in certain applications by stepwise resistance switching means with each position or setting being dedicated to a particular type of electrode.

Various modifications may be made in the circuitry. For example the liquid crystal display may be replaced by a plotter or a dosage control device, or a temperature stability circuit may be incorporated.

Various modifications may also be made in constructional techniques for the electrode manufacture. The electrode may for example be manufactured by screen printing techniques e.g. in a multi-stepped

procedure comprising:-

- 30 I - screen printing of Ag/AgCl reference electrode and metal tracing.
- II - screen printing of the active electrode with a printing ink comprising a colloidal carbon, glucose oxidase in buffer, and an organic polymer.
- III - screen printing, spraying or dip coating to provide a membrane over the assembly.

Advantages of this method are that it is amenable to high volume automation, and is of high

35 reproducibility

To this end, there can be used a suspension in a liquid medium of carbon together with at least one of (a) an enzyme and (b) a mediator compound capable of transferring charge to the said carbon from the enzyme when the enzyme is catalytically active, the said suspension being formed as a printable and conductive ink for use in the fabrication of electrodes as described above. Preferably, both the enzyme (e.g. glucose oxidase) and the mediator (e.g. ferrocene or a ferrocene derivative) are present in the ink formulation.

The mediator may be in the form of a mediator/hapten conjugate, i.e. be linked to a ligand material so that its activity in its charge-transferring property is a measure of further or competitive binding reaction with a specific binding agent with which the eventual electrode, having the specialized ink thereon, is contacted. A specific example is the theophylline/ferrocene conjugate described in copending Application entitled "Assay systems utilizing specific binding agents", of even date herewith. Other mediator/enzyme/ligand systems can be also utilized in the specialized ink. More generally in this respect, the area of first electrode may comprise (a) a ligand such as an antibody (b) an antigen, such as a hapten, with specific binding properties thereto (c) the mediator, conjugated to either (a) or (b) and electrochemically active only when (a) and (b) are not specifically bound. Such an electrode is useful in assay of a system which unbinds 50 (a) and (b), at least in part, thereby to provide mediator for the enzyme/substrate reaction.

That copending Application 84303090.9 also describes a further modification of electrode treatment in which a metal such as gold is pretreated with a mediator compound such as a ferrocene containing a sulphur-containing linking group. Examples of preparation of such materials as the direct monothiol, the low alkylene - omega monothiols (C_1-C_6) the compound $FC-CH_2-CH_2-CH_2-CH_2-SH$ or the compounds in which a chain of sulphur atoms connect the ferrocene ring systems are given in that copending Application.

Thus, an electrode dip or contact solution for a noble metal electrode such as gold can be prepared containing such a sulphur-linkable ferrocene, and give a coated electrode with a ferrocene-type layer

adherently in place.

Claims

1. A sensor electrode system of the kind for use in detecting, measuring or monitoring a component in a liquid mixture, by monitoring the flow of current when an oxidoreductase enzyme catalyses a redox reaction of a substrate, and a mediator compound transfers electrons between an electrode and the catalytically active oxidoreductase enzyme; characterised in that the sensor electrode system comprises a throw away strip test electrode carrier carrying an area of working electrode material comprising the enzyme and the mediator compound, the area being adjacent to but non-contiguous with an area of reference electrode material, both electrode areas being of small dimension, and extending as or supported on the electrode carrier formed as an elongate member to facilitate manipulation before or during contact with live tissue or with a small withdrawn sample of body fluid.
2. A sensor electrode system according to claim 1, comprising the elongate support member; on a surface thereof the area of the working electrode material being of electrically conductive material comprising at least at an outer surface thereof the combination of the enzyme and the mediator compound; on the surface of the elongate member, the area of the reference electrode; and separate electrical connection to each electrode for attachment to a read-out means denoting presence, amount, or monitored level of the said one or more selected components in a liquid medium with which the support member is contacted to contact both electrodes.
3. A sensor electrode system according to claim 2, which comprises (a) a flat first electrode area of known area small enough to be completely coverable by the smear of blood produced from a non-expressed drop of blood generated from a needle-prick at a bodily extremity, and (b) a reference electrode area that the said blood smear also reaches the reference electrode to establish electrical communication and (c) separate conductive elements extending along The same surface of the elongate support member, communicating one with each electrode for connection to signal read-out means attachable to one end of the member.
4. A sensor electrode system according claim 1, 2 or 3 in which the area of working electrode material is square.
5. A sensor electrode system according to any of claims 1 to 4, in which the area of working electrode material is less than 25 mm².
6. A sensor electrode system according to any preceding claim, in which the reference electrode is silver/silver chloride.
7. A sensor electrode system according to claim 1, wherein the working electrode and the reference electrode are carried on the same face of an elongate non-conductive carrier of rectangular cross-section.
8. A sensor electrode system according to claim 7, in which the area of the working electrode material is towards one end of the surface of the elongate member, and the area of the reference electrode is also towards the said end.
9. A sensor electrode system according to any preceding claim, wherein the working electrode and the reference electrode are carried on opposite faces of an elongate non-conductive carrier of rectangular cross-section.
10. A sensor electrode system according to any preceding claim, in which the enzyme is a glucose enzyme.
11. A sensor electrode system according to any preceding claim, in which the mediator is a ferrocene.

Reindications

1. Un système d'électrodes pour détecteurs du genre destiné à une utilisation dans la détection, la mesure ou le contrôle d'un composant dans un mélange liquide en contrôlant le débit de courant lorsqu'une enzyme oxydoréductase catalyse une réaction redox d'un substrat et qu'un composé médiateur transfère des électrons entre une électrode et l'enzyme oxydoréductase catalytiquement active, caractérisé en ce que le système d'électrodes pour détecteurs comprend un porteur d'électrode, caractérisé en ce que le système d'électrodes pour détecteurs comprend une zone de matière formant électrode de des sous forme d'une languette test à jeter comportant une zone de matière adjacente mais non contiguë à une travail comprenant l'enzyme et le composé médiateur, la zone étant adjacente mais non contiguë à une zone de matière formant électrode de référence, les deux zones d'électrodes étant de faible dimension et s'étendant sur ou supportées par le porteur d'électrodes qui se présente sous la forme d'un élément allongé de manière à faciliter la manipulation avant ou pendant le contact avec le tissu vivant ou avec un petit échantillon prélevé de fluide corporel.
2. Un système d'électrodes pour détecteurs suivant la revendication 1, comprenant un élément support de forme allongée sur la surface duquel la zone de matière formant électrode de travail qui est constituée d'une substance électro-conductrice comprend au moins à une de ses surfaces externes l'association de l'enzyme et du composé médiateur; sur la surface de l'élément allongé, la zone d'électrode de référence et une connexion électrique séparée à chaque électrode pour un raccordement à une référence et une connexion électrique séparée à chaque électrode pour un raccordement à un dispositif de sortie des données de mesure montrant la présence, la quantité ou le taux contrôlé dudit ou desdits composants sélectionnés dans un milieu liquide avec lequel l'élément support est mis en contact de manière à assurer le contact avec chacune des électrodes.
3. Un système d'électrodes pour détecteurs suivant la revendication 2, qui comprend (a) une première zone d'électrode plane de zone connue suffisamment petite pour pouvoir être complètement couverte par la tache de sang produite par une goutte non exprimée de sang provenant d'une piqûre d'aiguille à une extrémité corporelle et (b) une zone d'électrode de référence sur la même surface mais séparée de tout en étant suffisamment proche de la zone d'électrode sensible de sorte que ladite tache de sang des atteint également l'électrode de référence pour établir une communication électrique et (c) des éléments conducteurs séparés s'étendant le long de la même surface de l'élément support allongé, communiquant chacun avec une électrode pour assurer la connexion avec un dispositif de réception des données de mesure pouvant être attaché à une extrémité du membre.
4. Un système d'électrodes pour détecteurs suivant la revendication 1, 2 ou 3, dans lequel la zone de la matière formant électrode de travail est carrée.
5. Un système d'électrodes pour détecteurs suivant l'une quelconque des revendications 1 à 4, dans lequel la zone de la matière formant électrode de travail est inférieure à 25 mm².
6. Un système d'électrodes pour détecteurs suivant l'une quelconque des revendications précédentes, dans lequel l'électrode de référence est une électrode argent/chlorure d'argent.
7. Un système d'électrodes pour détecteurs suivant la revendication 1, dans lequel l'électrode de travail et l'électrode de référence sont supportées sur la même face d'un support allongé non conducteur de section transversale rectangulaire.
8. Un système d'électrodes pour détecteurs suivant la revendication 7, dans lequel la zone de la matière formant électrode de travail est située vers une extrémité de la surface de l'élément allongé et la zone de l'électrode de référence est également située vers la même extrémité.
9. Un système d'électrodes pour détecteurs suivant l'une quelconque des revendications précédentes, dans lequel l'électrode de travail et l'électrode de référence sont supportées sur les faces opposées d'un support allongé non conducteur de section transversale rectangulaire.
10. Un système d'électrodes pour détecteurs suivant l'une quelconque des revendications précédentes, dans lequel l'enzyme est une enzyme de glucose.
11. Un système d'électrodes pour détecteurs suivant l'une quelconque des revendications précédentes, dans lequel le médiateur est un ferrocène.

Patentansprüche

1. Sensor-Elektrodensystem zur Verwendung beim Nachweisen, Messen oder Überwachen einer Komponente in einer flüssigen Mischung, durch Überwachen des Stromflusses bei einer Redoxreaktion eines Substrates, die durch ein Oxidoreductase-Enzym katalysiert wird, wobei eine Vermittlerverbindung Elektronen zwischen einer Elektrode und dem katalytisch aktiven Oxidoreductase-Enzym überträgt, dadurch gekennzeichnet, daß das Sensor-Elektrodensystem einen wegwerfbaren Streifen-Elektroden-Träger aufweist, der eine Fläche aus Arbeits-Elektrodenmaterial trägt, welche das Enzym und die Vermittlerverbindung umfaßt, wobei diese Fläche benachbart zu einer Fläche aus Referenz-Elektrodenmaterial ist, jedoch nicht an diese anstößt, und wobei die beiden Elektrodenflächen klein dimensioniert sind und sich selbst als längliches Teil oder als vom länglich geformten Elektroden-Träger getragenes Teil erstrecken, um Manipulationen vor oder während eines Kontaktes mit Lebendgewebe oder mit einer kleinen Entnahmeprobe aus Körperflüssigkeit zu erleichtern.
2. Sensor-Elektrodensystem nach Anspruch 1, das den länglichen Trägereil beinhaltet, wobei auf dessen einer Oberfläche die Fläche aus Arbeits-Elektrodenmaterial aus elektrisch leitendem Material ist, welches wenigstens an seiner äußeren Oberfläche die Kombination des Enzymes und der Vermittlerverbindung beinhaltet, wobei auf der Oberfläche des länglichen Teiles die Fläche der Referenz-Elektrode ist, und wobei eine getrennte elektrische Verbindung zu jeder Elektrode für einen Anschluß an ein Auslesemittel vorgesehen ist, welches Vorhandensein, Menge oder überwachten Pegel der einen oder der mehreren ausgewählten Komponenten eines flüssigen Mediums anzeigt, das auf dem Träger aufgebracht ist, zur Kontaktierung der beiden Elektroden.
3. Sensor-Elektrodensystem nach Anspruch 2, mit
 - (a) einem flachen ersten Elektrodenbereich bekannter Fläche, die klein genug ist, um vollständig durch den Blutabstrich bedeckt zu werden, der von einem nicht ausgedrückten Bluttröpfchen stammt, welcher durch einen Nadelstich in eine Körperextremität entnommen wird,
 - (b) einer auf derselben Oberfläche angeordneten Referenz-Elektrodenfläche, die zwar getrennt, aber doch so nah zur empfindlichen Elektrodenfläche liegt, daß der Blutabstrich auch die Referenz-Elektrode erreicht, um eine elektrische Verbindung herzustellen und
 - (c) getrennten, leitenden Elementen, die sich entlang der gleichen Oberfläche des länglichen Trägereiles erstrecken, wobei jeweils eines mit jeder Elektrode verbunden ist, für einen Anschluß an ein Signal-Auslesemittel, die an einem Ende des Teiles angebracht werden können.
4. Sensor-Elektrodensystem nach Anspruch 1, 2 oder 3, dadurch gekennzeichnet, daß die Fläche aus Arbeits-Elektrodenmaterial quadratisch ist.
5. Sensor-Elektrodensystem nach einem der Ansprüche 1 bis 4, dadurch gekennzeichnet, daß die Fläche aus Arbeits-Elektrodenmaterial kleiner als 25 mm² ist.
6. Sensor-Elektrodensystem nach einem der vorstehenden Ansprüche, dadurch gekennzeichnet, daß die Referenz-Elektrode aus Silber/Silberchlorid ist.
7. Sensor-Elektrodensystem nach Anspruch 1, dadurch gekennzeichnet, daß die Arbeits-Elektrode und die Referenz-Elektrode auf derselben Fläche eines länglichen nichtleitenden Trägers rechteckigen Querschnittes aufgebracht sind.
8. Sensor-Elektrodensystem nach Anspruch 7, dadurch gekennzeichnet, daß die Fläche des Arbeits-Elektrodenmaterials zu einem Ende der Oberfläche des länglichen Teiles hin angeordnet ist, und daß die Fläche der Referenz-Elektrode ebenfalls zu diesem Ende hin angeordnet ist.
9. Sensor-Elektrodensystem nach einem der vorstehenden Ansprüche, dadurch gekennzeichnet, daß die Arbeits-Elektrode und die Referenz-Elektrode auf entgegengesetzten Flächen eines länglichen Trägers nichtleitenden Materials rechteckigen Querschnittes aufgebracht sind.
10. Sensor-Elektrodensystem nach einem der vorstehenden Ansprüche, dadurch gekennzeichnet, daß das Enzym ein Glukoseenzym ist.

11. Sensor-Elektrodensystem nach einem der vorstehenden Ansprüche, dadurch gekennzeichnet, daß die Vermittlersubstanz ein Ferrocen ist.

5

10

15

20

25

30


35



40





45

50

55

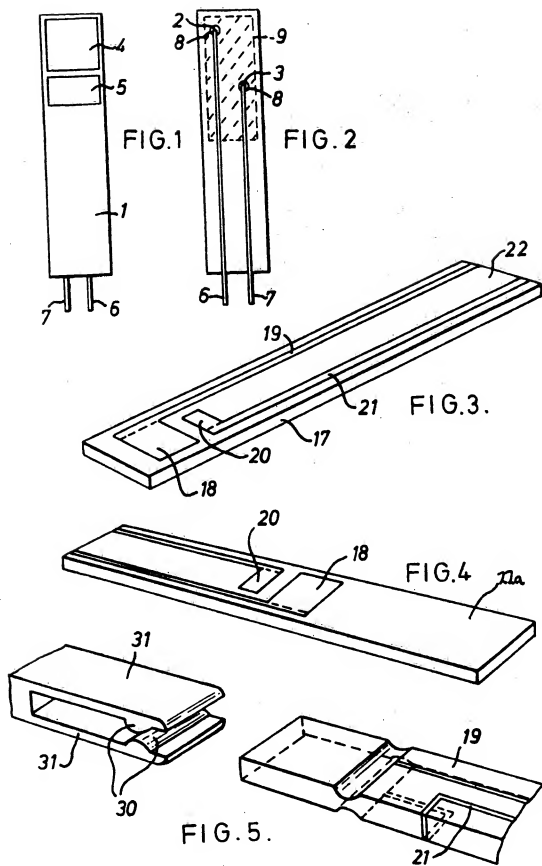

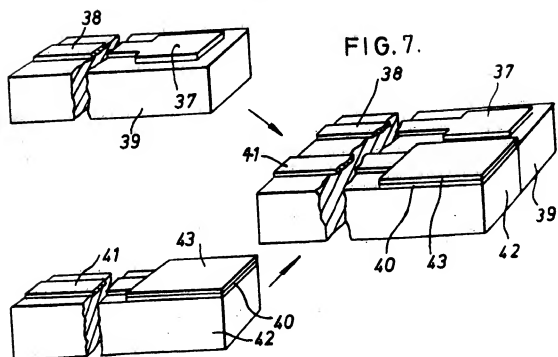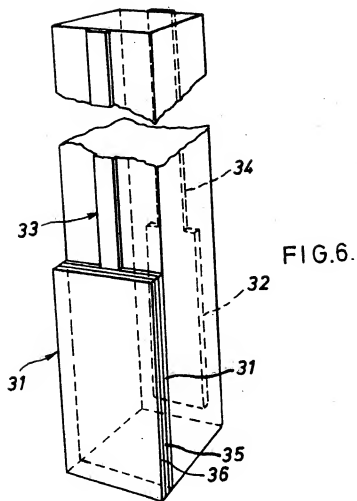

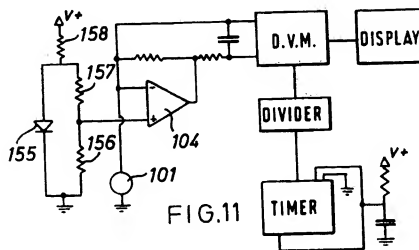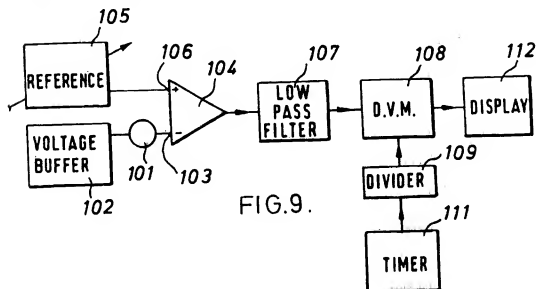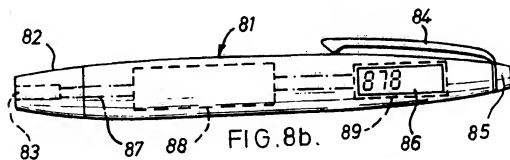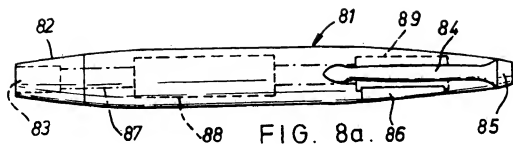

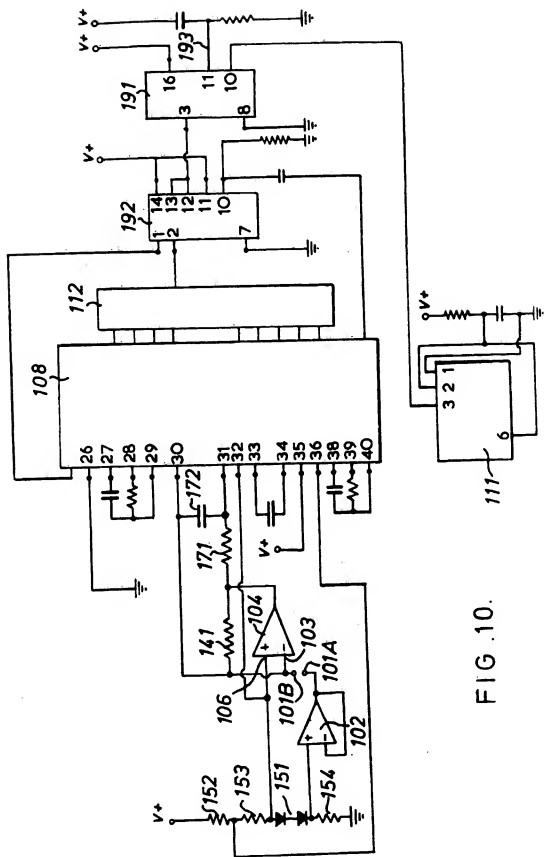


FIG. 10.

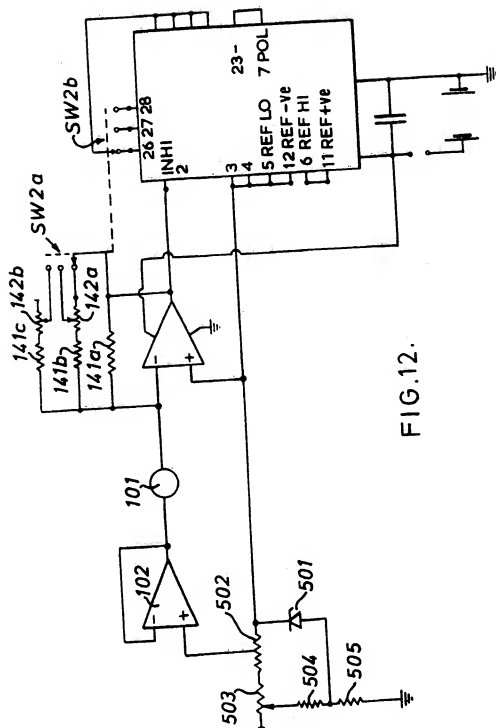


FIG.12.